

MULTI-PURPOSE / 多種用途泵

Standard Inline Pump - IL Series

標準管道泵 - IL 系列



IL Series



Feature

- In-line, easy installation
- Light and excellent design
- Long life
- Nominal connection diameters: DN32 - DN 250
- Pump housing : cast iron EN-GJL-250
- Lantern: cast iron EN-GJL-250
- Impeller (standard): cast iron EN-GJL-200
- Pump shaft: stainless steel 1.4122
- Mechanical seal: AQ1EGG
- Speed range: 960/1450/2900
- Protection class: IP 55
- Insulation class: F

Application

- Hot water circulation and heating system
- Air-conditioning systems
- Industrial circulation systems
- General pressure boosting in household

Performance Curve

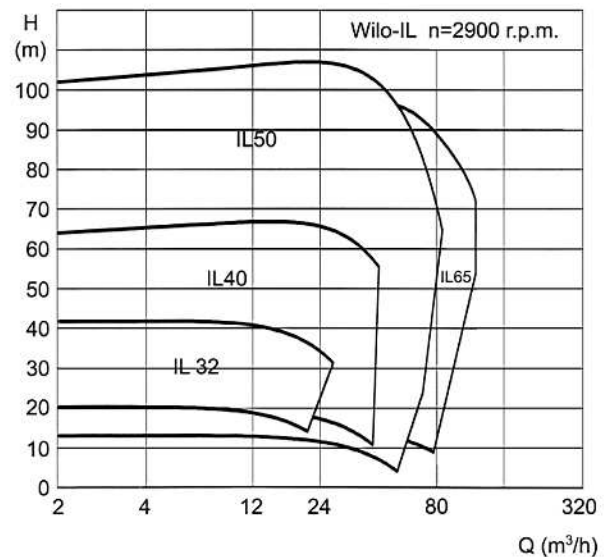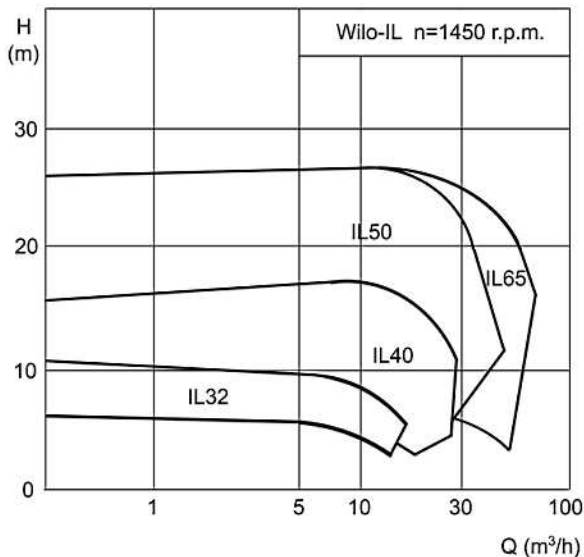

Specification

	IL Series
Power source	3~400V/50Hz
Max power (kW)	200
Fluid temp (°C)	-20 - 140
Max head (m)	105
Max flow (m³/h)	800
Inlet / outlet size	DN32 - DN250
Max pressure (bar)	13