

MULTI-PURPOSE / 多種用途泵

Peripheral Pump

渦旋泵



PWN-162

Feature

- Long life
- Low flow at high head
- Casing: cast iron
- Impeller: brass
- Shaft: stainless steel
- Mechanical seal: carbon & ceramic


Application

- For clean water
- For various machinery
- Pressure boosting in household



PWN-240E

Performance Curve

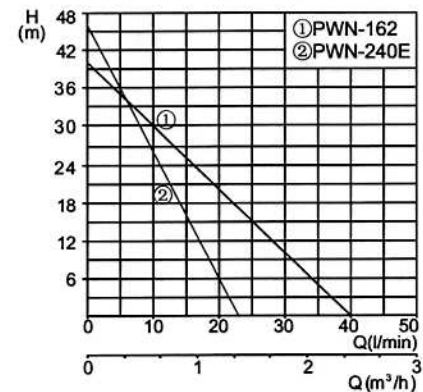

Specification

	PWN-162	PWN-240E
Power source	1~220V/50Hz	
Input / output power (W)	370 / 125	350 / 240
Fluid temp (°C)	40	
Max head (m)	40	46
Max flow (l/min)	40	23
Inlet / outlet size (mm)	25 / 25	15 / 15
Max pressure (bar)	-	5.0

Centrifugal Pump

離心泵



PUN-200E

Feature

- Big flow at low head
- Compact design
- Casing: cast iron
- Impeller: brass for PUN-200E, plastic for PUN-600E
- Shaft: stainless steel
- Mechanical seal: carbon & ceramic


Application

- General water supply for house, garden
- Small HVAC circulation system



PUN-600E

Performance Curve

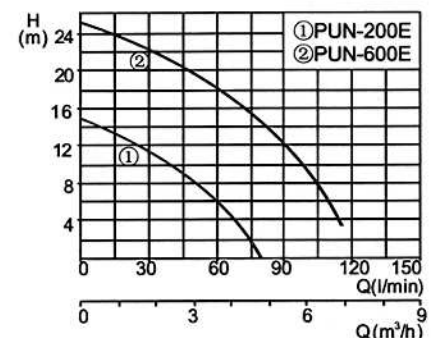

Specification

	PUN-200E	PUN-600E
Power source	1~220V/50Hz	
Input / output power (W)	400 / 200	960 / 600
Fluid temp (°C)	90	
Max head (m)	15	25
Max flow (l/min)	80	115
Inlet / outlet size (mm)	25 / 25	25 / 25
Max pressure (bar)	4.0	4.0