

HOT WATER CIRCULATION / 熱水循環泵

Standard Pump - RS Series, RL25/7.5, TOP-S40/15DM, ST20/11
標準泵 - RS 系列, RL25/7.5, TOP-S40/15DM, ST20/11



RS15/6, RS25/6, RS25/8

Feature

- Wet motor pump and low noise
- Three pre-selectable speed stages for power adjustment
- Electrical connections possible on both sides of the terminal box
- Terminal box position: 3h; 6h; 9h; 12h
- Casing: cast iron
- Impeller: plastic
- Shaft: stainless steel



Application

- Hot water heating systems of all kinds
- Industrial circulation systems
- Cold water system and air-conditioning systems
- Roof tank to water tap transfer (ST20/11 with flow switch)




RL25/7.5

Performance Curve

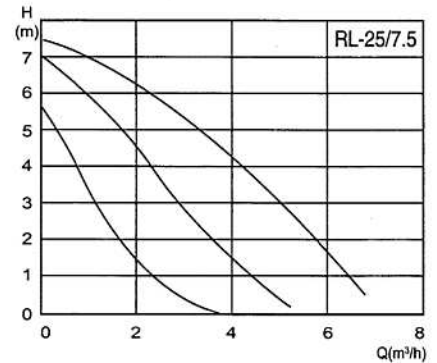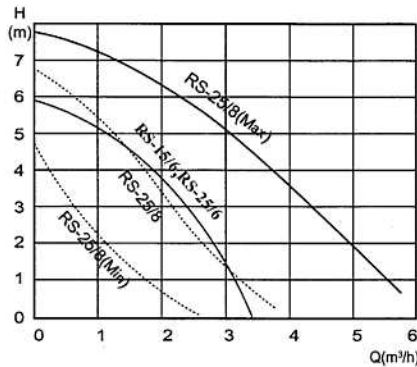

TOP-S40/15DM

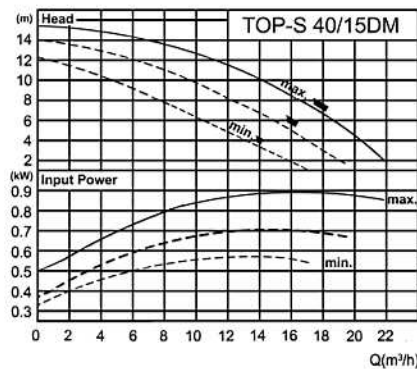

ST20/11

Specification

	RS15/6	RS25/6	RS25/8	RL25/7.5	TOP-S40/15DM	ST20/11
Power source	1~220V/50Hz				3~380V/50Hz	1~220V/50Hz
Input power (W)	93/67/46	93/67/46	151/113/81	205/165/115	925/745/600	165
Fluid temp (°C)	-10 - +110			-10 - +130	-20 - +130	+20 - +65
Total head (m)	6/5/3	6/5/3	7.8/6.8/4.8	7.5/7/5.6	15/13.9/12.4	11
Max flow (m³/h)	2.5/2.5/1.5	2.5/2.5/1.5	6/4/2.5	6/5/3	21.6/19/17	2.1
Inlet / outlet size (mm)	15 / 15	25 / 25	25 / 25	25 / 25	40 / 40	25 / 25
Max pressure (bar)	10	10	10	10	10/16	10